



# **Sullivan Palatek**

*“The Ultimate Performance Rotary Screw Air Compressor”*



**EXTENDED LIFE**  
Mounted desiccant dryer  
to eliminate moisture  
and contaminants,  
-40° F Dew Point.

STANDARD CDD  
MODEL SHOWN

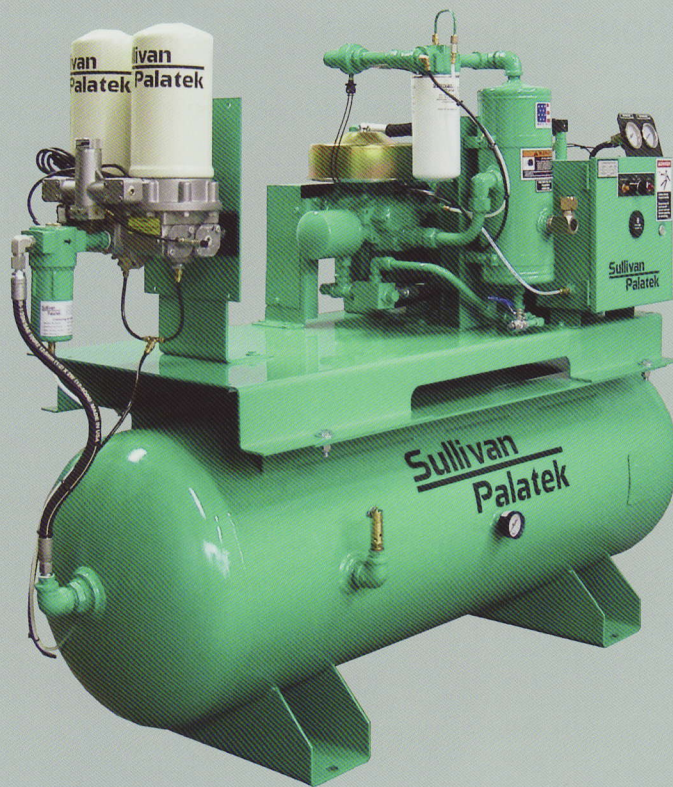

- Rotary screw compressor,  
cool, clean air.
- Compact design.
- 100 percent duty cycle.
- 2-year air end warranty.

*Complete package with starter,  
air cooled oil cooler/aftercooler  
and protective devices for high  
temperature and low  
oil shutdown.*

**COMPRESSOR & DESICCANT DRYER PACKAGE**

**STANDARD FEATURES**

- COMPRESSOR:** Oil flooded rotary screw, continuous duty, industrial air compressor.
- ELECTRIC MOTOR:** 200/208/230/460/575 VOLT, 3-phase, open drip motor. Single phase 230 volt, 5, & 7.5 HP also available.
- MOTOR STARTER:** Full voltage magnetic starter with 110 volt control.
- CONTROLS:** Constant speed with two operating modes, continuous run or auto start/stop.
- INSTRUMENTATION:** Line pressure gauge, operating temperature gauge, hour meter.
- COOLING SYSTEM:** Air cooled oil cooler/aftercooler with Palasyn 45 (4000 hour) synthetic lubricoolant. Spin on type lube filter and air/oil separator for ease of maintenance.
- AIR FILTER:** Replaceable dry type.
- AIR DRYER:** Desiccant Air Dryer/Filter for moisture removal. Spin on replaceable cartridges with desiccant contained filter media enclosure.  
- 40°F Dew Point.
- AIR RECEIVER:** 80 gal. with auto-drain, relief valve and pressure gauge.  
Other size receivers available.

**GENERAL SPECIFICATIONS**

MODEL	CDD	CDDE
Oil Reservoir Capacity	1 Gal.	1 Gal.
Length	69"	69"
Height	54"	60"
Width	26-1/4"	33"
Weight (lbs.) 5HP	700	775
Weight (lbs.) 7.5 HP	750	825
Weight (lbs.) 10HP	800	875
Discharge Connection	1/2"N.P.T.	1/2"N.P.T.

**Sold and Serviced By:**

OPTIONAL CDDE MODEL SHOWN

